

Energy saving 节能
Stable 稳定
Direct-drive 直驱



DL7200 | SERIES DL7200A | SERIES


直驱式单针自动切线平缝车
SINGLE NEEDLE DIRECT DRIVE LOCKSTITCH
MACHINE WITH THREAD TRIMMER



DL7200A



DL7200 SERIES FEATURES

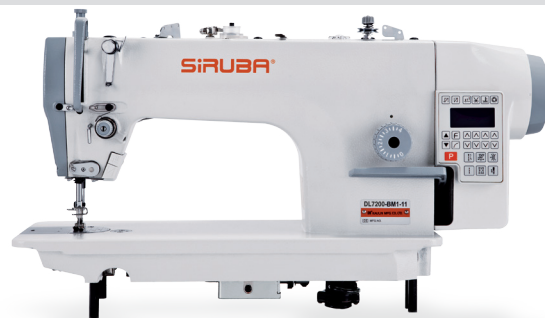


采用小型直驱伺服马达，起缝快速，定位精准，低噪音，无皮带屑污染

Mini direct drive servo motor system provides quick start sewing, precise positioning, low noise, and no belt dust.




安全开关 机器倾斜时即停机，确保安全

Safety switch : Stops running when the machine is tilted to ensure safety.



操作空间大，方便缝制物移动

Working space is wide for moving sewing material.




耗能小，较皮带驱动可节能35%

Low power consumption, it saves 35% energy against V-belt driving.



全自动供油确保机器在高速下的耐用性

Auto-lubrication ensures the mechanism's durability in high speed.



针送机型(NM, NH): 针送机构提供安定且强韧的送布力，针与布的不同步动作让线迹整齐，避免错位的發生。

Needle Feed Model(NM, NH): The needle-feeding mechanism provides stability and efficiency of feed, and prevents uneven material feed effectively.



[选配] 不锈钢車布導板

[Optional] Stainless steel sewing bed



圆刀式切线，棉线、丝光线均可轻易切断

Rotary thread trimmer is applicable to various type of thread.



配備电子夹线器，补针按键安装在倒缝按键的上方，方便工人操作

Equipped with electric thread nipper. Half-stitch key is set above the reverse key for easy using.



可调节亮度的LED灯

Adjustable LED light.



最大针距可达4针/英寸

Maximum stitch length is up to 4 stitch/inch.

规格/ Specification

L3				Needle No. DBX1	S.P.M.(Max)	功能选配 Function				
						代碼 Function Code	倒縫 Reverse Feeding	電子夾線 Thread Nipper	抬壓腳 Auto Lifter	
DL7200-BH1	0-6	15.5	手动 Hand 5.5	自动 Auto 10-13	#20~#23	3500	15	V	V	V
DL7200-BM1	0-5	18			#11~#14	4000				
DL7200-BX2	0-7	18			#20~#23	3500				
DL7200-NM1	0-4	14.7			#11~#14	4000				
DL7200-NH1	0-5	14.7			#20~#23	3500				

DL7200A SERIES FEATURES



延续DL7200优异的车缝性能, 再新增特点

- 1.新切线机构：超短切线线头(3mm)
- 2.封闭式油盘：
- 3.新型操作面板：

Following the excellent sewing performance of DL7200, and added the new features


- 1.New trimming mechanism: Very short trimmed thread end (3mm)
- 2.Sealed oil tank:
- 3.New control panel:



新切线机构：超短切线线头(3mm)
传统的切线机构为一组固定刀与活动刀, 新切线机构为双动刀设计, 在最接近针板处, 进行切线动作, 达成超短线头效果

New trimming mechanism: Very short trimmed thread end (3mm)

Traditional trimming mechanism is a pair of fixed knife and moving knife. The new trimming mechanism is a pair of dual-moving knives. Thread trimming is made at the point near the needle plate to have a very short trimmed thread end.



封闭式油盘
传统的油盘为开放式, DL7200A以封闭式设计, 确保机油不飞溅

Sealed oil tank

Traditional oil tank is open type. DL7200A's oil tank is sealed type, which the oil will not come out from the machine.



新型操作面板

- 设定参数图示化, 并有中英文提示, 直觉式操作, 不需查阅说明书
- 各项功能的快捷键: 分区, 动线设计良好, Reset键可立即恢复原厂设定
- 可外接网络模块, 已经预留物连网功能的接头
- 电容感应式触摸按键, 相较之前的面按键式, 没有褪色或破裂的问题, 为经济务实的选择

New control panel

- Parameters are shown by graphic with English and Chinese, which makes intuitive operation and no need to check manual book.
- Hot keys of the functions: layout and setting route are clear. The Reset key makes the default setting easily.
- Equipped with a plug for Connecting network module.
- CapSense Touch Button is economic and practical without the problems of printing film button (broken, fade...etc.)



选配: 外接网络模块
Optional: External network module

L4	mm		mm		Needle No. DBX1	S.P.M.(Max)
	mm	mm	mm	mm		
DL7200-BH1	0-6	15.5	手动 Hand	自动 Auto	#20~#23	3500
DL7200-BM1	0-5	18	5.5	10-13	#11~#14	4000

功能选配 Function			
代碼 Function Code	倒縫 Reverse Feeding	電子夾線 Thread Nipper	抬壓腳 Auto Lifter
15	√	√	
16	√	√	√